

# Nexx Garage

Model NXG-100

Installation Guide V1.4

## Thank you for purchasing Nexx Garage!

Installation will be quick and easy and should take about 20 minutes to complete. For additional installation instructions please visit or email us at:

Website:

<http://www.nexxgarage.com>

<http://www.nexxgarage.com/videos>

<http://www.nexxgarage.com/documentations>

Email: [support@nexxgarage.com](mailto:support@nexxgarage.com)

## Step 1 of 10

### Installation Tools Needed

- Flathead screwdriver
- Stepladder
- Masking tape
- Compatible Apple iPhone or Android phone



## Step 2 of 10

### Unpack the contents of your box

Your package should contain the following:

- A. Nexx Garage Device



- B. 8 double sided adhesive tape



- C. Door sensor and cable



- D. 4 Self-tapping screws





- E. Installation manual

## Step 3 of 10

### Mobile App Setup

- Make sure you are on your home WiFi and **NOT** mobile WiFi
- Install "Nexx Garage" app from Google Playstore or Apple Appstore
- Launch "Nexx Garage" app
- From Login screen, tap "Create Account"
  - Enter first and last name
  - Enter email address for your login name
  - Enter password and confirm address
  - Reviewing our Terms and Services, tap "Accept Terms"
  - Tap "Register" located at upper right corner

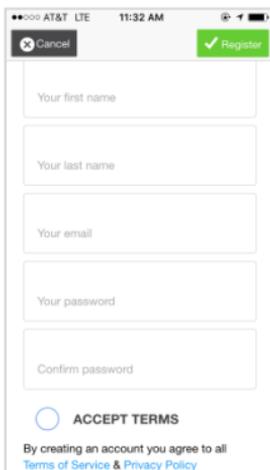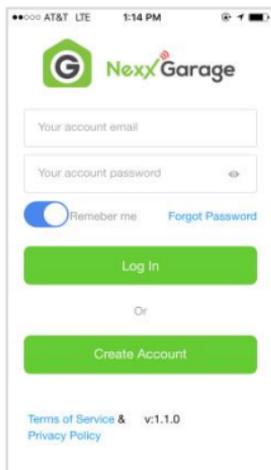

## Step 4 of 10

### Connect to Nexx Garage WiFi network

- Power your Nexx Garage device. The LED light from the device should be solid green.
- From your smart phone, go to WiFi settings and select "**NexxGarage-xxxxxxx**" WiFi network. Enter "**12345678**" for password. Enter only numbers, no quotation marks.
- Go to our website for video:  
<http://nexxgarage.com/videos>

#### Example from iOS



## Step 5 of 10


### Connect to your WiFi network

- Switch to Nexx Garage app. Tap the menu button which is located on the upper left hand corner. Select "Configure Device" from the menu. You should see a list of available WiFi networks. The list will take about 1 to 3 minutes to display.
- Select your home WiFi network.
  - Enter your home WiFi network password.
  - Tap "Configure" located on the upper right hand corner.
- A message box will appear to confirm your password.
- Once confirmed, in less than 30 seconds, your device will reboot. The LED light will blink several times and then stop. When the LED light is not on, this indicates that it has successfully connected to your WiFi network.
- If your device continues to blink, press the reset button on the device for 5 seconds until the LED light becomes solid green. Then repeat step 5.
- If you have further issues, please contact **support@nexxgarage.com** or go to **<http://www.nexxgarage.com>**

## Step 6 of 10

### Install the Device


Mount the device on top of your garage door opener (GDO) near the GDO terminals using the double sided adhesive tape. Clean the surface on top of your garage door opener before using the double sided tape to secure the device. Make sure the device is close enough to the terminals of the GDO so that you can connect wires to the device to the GDO.

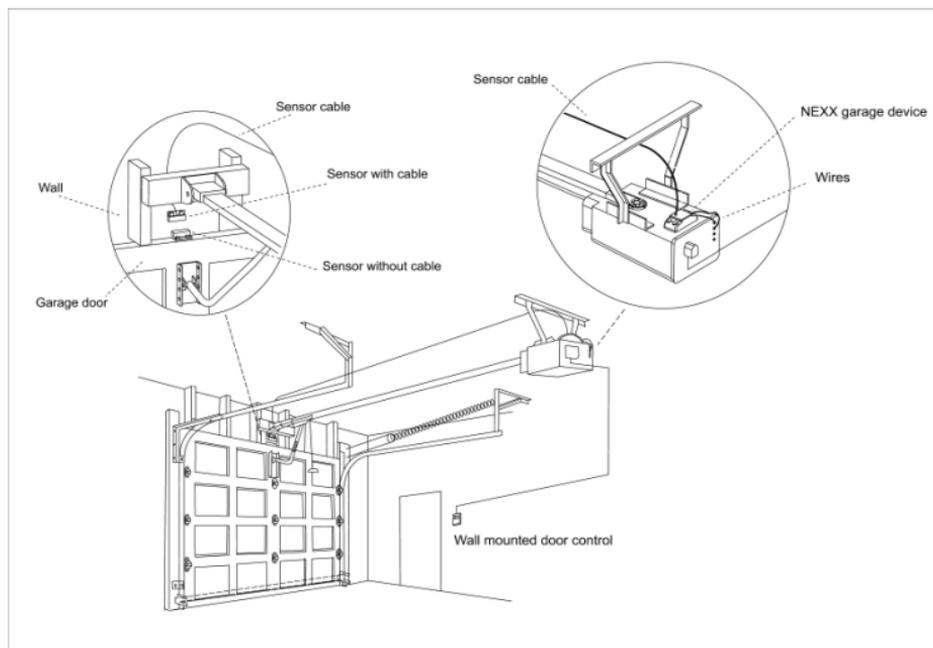

## Step 7 of 10

### Connect the device to your opener

- Locate two exposed wires coming out of the Nexx Garage device.
- Connect these two exposed wires to your garage door opener (GDO). Connect them to the same wire as your wall console or manual button to open/close the garage door (see diagram below).
- If a wire is currently connected to the terminal of the GDO, then take out the existing wire from the GDO terminal. Twist the two wires together and reconnect it back to the GDO.

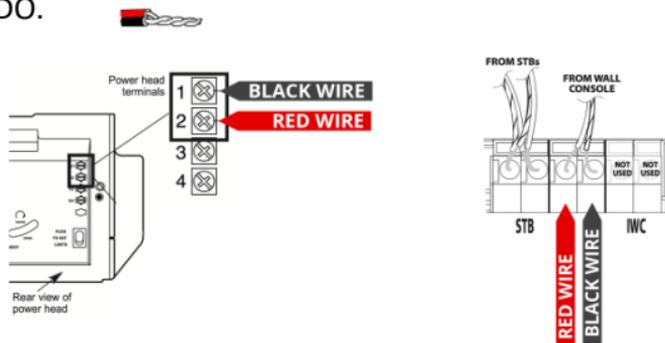


- Sample connection diagrams for your specific opener model can be obtained by emailing [support@nexxgarage.com](mailto:support@nexxgarage.com)

## Step 8 of 10

### Install the sensor

- Locate the sensor (Part C). The sensor has 2 parts. One is connected to the cable while the other is not.
- Mount the sensor that is connected to the cable to the center of the wall adjacent to the garage door, just above the garage door. Use the included double sided tape to secure the sensor. If you have screws, you may use that instead.
- Mount the other sensor (the one NOT connected to a cable) on center top of the garage door using the double sided tape. If you have screws, you may use that instead.
- Secure the remaining wires along the walls and ceiling using the included double sided tape to avoid any moving parts of the door. You can also use other alternatives to secure the cable such as cable clips or staples.

# Sensor installation diagram

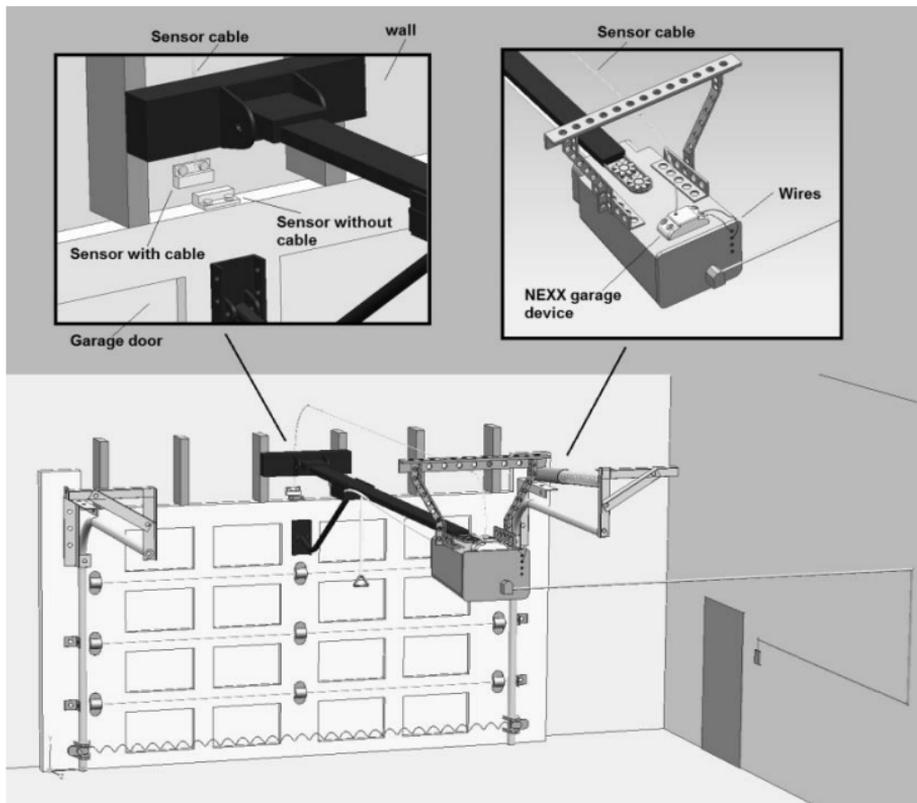

## Step 9 of 10

### Power up Nexx Garage Device

- Plug the power cable of the device into an outlet.
- The LED light from the device should blink several times and turn off. Once the LED light is off, this will indicate that the device has successfully connected to your WiFi network.
- If you cannot get the LED light to be off, then please repeat step 4 or contact us at **support@nexxgarage.com** or go to **<http://www.nexxgarage.com>**

## Step 10 of 10

### Testing

- At this point, the app should indicate that you are connected to the device and that the door is currently closed.
- Press the garage door icon. Your garage door should be opening and the app should indicate that your garage door is opened.
- Press the garage door icon again. Your garage door should be closing. When the garage door is completely closed, the app should indicate that your garage door is closed.

## Installation Completed!

Congratulations on completing the installation. If you had any difficulties on installing Nexx Garage device or if you have general questions, please email us at

**[support@nexxgarage.com](mailto:support@nexxgarage.com)** or visit us on the web at

**<http://www.nexxgarage.com>**.


# Nexx Garage Alexa Skill Setup




- Open the Amazon Alexa app on your phone
- Press menu button in the upper left hand corner of screen




- Select “Skills” from the menu

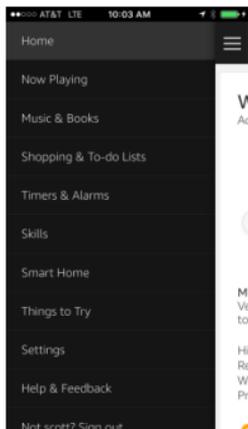

- Search for “Nexx Garage”

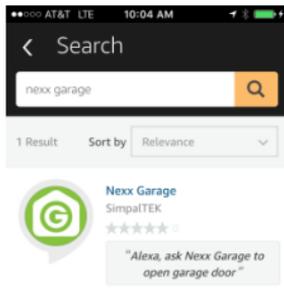


- 
- Select “Nexx Garage” skill
  - Press “Enable” button

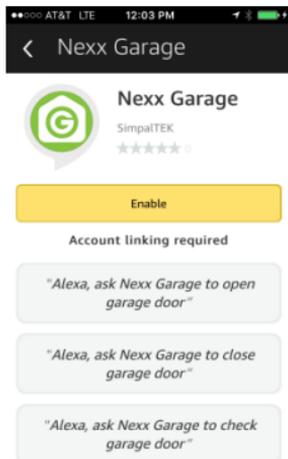

---

About this Skill

- Press “Link Account” button  
(Linking account will connect your amazon account to your Nexx Garage account)

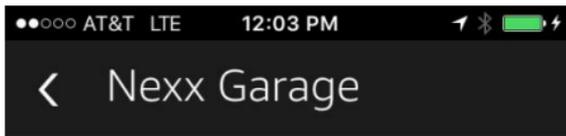

**Nexx Garage**

SimpalTEK



Disable Skill

Link Account


**Account linking required**

*"Alexa, ask Nexx Garage to open garage door"*

*"Alexa, ask Nexx Garage to close garage door"*

*"Alexa, ask Nexx Garage to check garage door"*


- Nexx Garage Login will appear. This may take about up to 2 minutes to come up, so please be patient.
  - Enter Nexx Garage account email and password
  - Enter a 4 to 10 digit pin code. This pin code is required by Amazon for security reasons when opening/closing the garage door. Pin code is not required when checking door status.



(This PIN code is to allow the closing and opening of the garage door. Other actions do not require a pin code. After 60 days, you are required to reset your PIN code.)

Log In

- Once you successfully logged in, you will receive this message

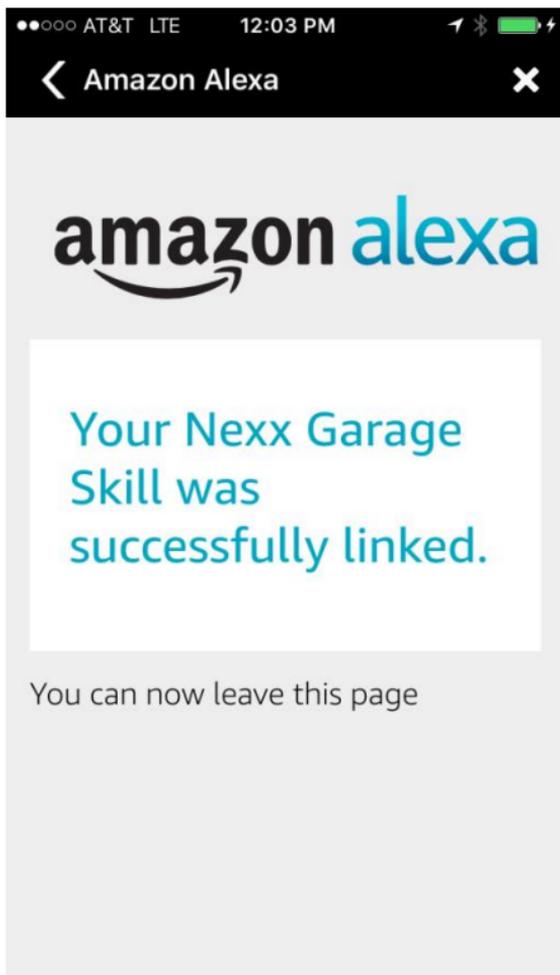

## Nexx Garage Alexa Skill Setup Completed!

- Possible Actions
  - “Alexa, tell Nexx Garage to check garage door”
  - “Alexa, tell Nexx Garage to open garage door”  
“My pin code is 1 2 3 4” (use your pin code)
  - “Alexa, tell Nexx Garage to close garage door”  
“My pin code is 1 2 3 4” (use your pin code)